

Attack Hose - DUZ/DURAMASTER™


Nitrile Rubber as cover and liner

Features

- Ribbed cover with great abrasion resistance, smooth liner for minimum friction loss
- Resistant to weather, UV, oxidation and most chemicals or petroleum products
- Flexible to deploy and roll up, compact coil for storage
- Long lifespan, maintenance-free and no drying required
- Temperature range from -4°F to 158°F (-20°C to 70°C)
- Standard length 50', 100', 200', up to 660'
- Applicable to Brass/Alu NST/NPSH threaded couplings, others on request



Construction

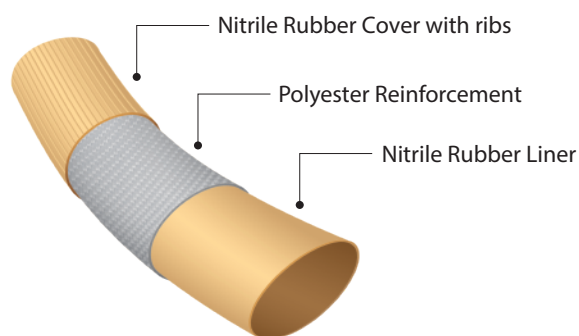

Standard

- Meets or exceeds UL 19 and BS 6391
- Within ISO-9001 quality management system

Application

- For municipal/industrial/forestry fire department
- Heavy duty water supply / for extreme conditions
- General pumping duties

Technical Data

Nominal Size		Working Pressure		Burst Pressure		Average Weight		Wall Thickness		Certification
inch	mm	psi	bar	psi	bar	Lbs./ft.	Kg/m	inch	mm	
1"	25	300, 400	21, 28	900, 1200	63, 84	0.18	0.28	0.079	2.4	/
1-1/2"	38	250, 300	17, 21	750, 900	51, 63	0.21	0.31	0.085	2.6	 DURAMASTER™ certified at 300psi
1-3/4"	45	250, 300	17, 21	750, 900	51, 63	0.24	0.36	0.114	2.9	
2"	52	250, 300	17, 21	750, 900	51, 63	0.30	0.45	0.118	3.0	
2-1/2"	65	250, 300	17, 21	750, 900	51, 63	0.39	0.58	0.118	3.0	
3"	75	250, 300	17, 21	750, 900	51, 63	0.58	0.87	0.118	3.0	
Nominal Size		Working Pressure		Burst Pressure		Average Weight		Wall Thickness		Certification
inch	mm	psi	bar	psi	bar	Lbs./ft.	Kg/m	inch	mm	
1-1/2"	38	218	15	654	45	0.209	0.311	0.083	2.1	
2"	52	218	15	654	45	0.279	0.415	0.114	2.9	
2-1/2"	65	218	15	654	45	0.383	0.570	0.118	3.0	

*Customized color, couplings and pressure requirement is available.